

Ocloc™ BRF SINGLE LOC

Ocloc BRF fence post 150mm wire hole spacings.

You can also order BRF in 75mm spacings.


Galfan protected. www.galfan.com

12 wire hole options.

1.8m thick wall.

High tensile steel.


Barbed wire notches on top and twitching holes.

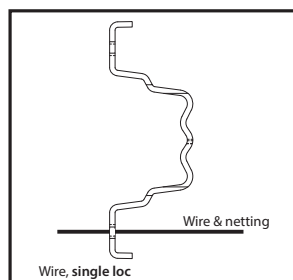



Ocloc Rural BRF open profile



Single loc wire hole. Netting is attached to the support wire with C rings

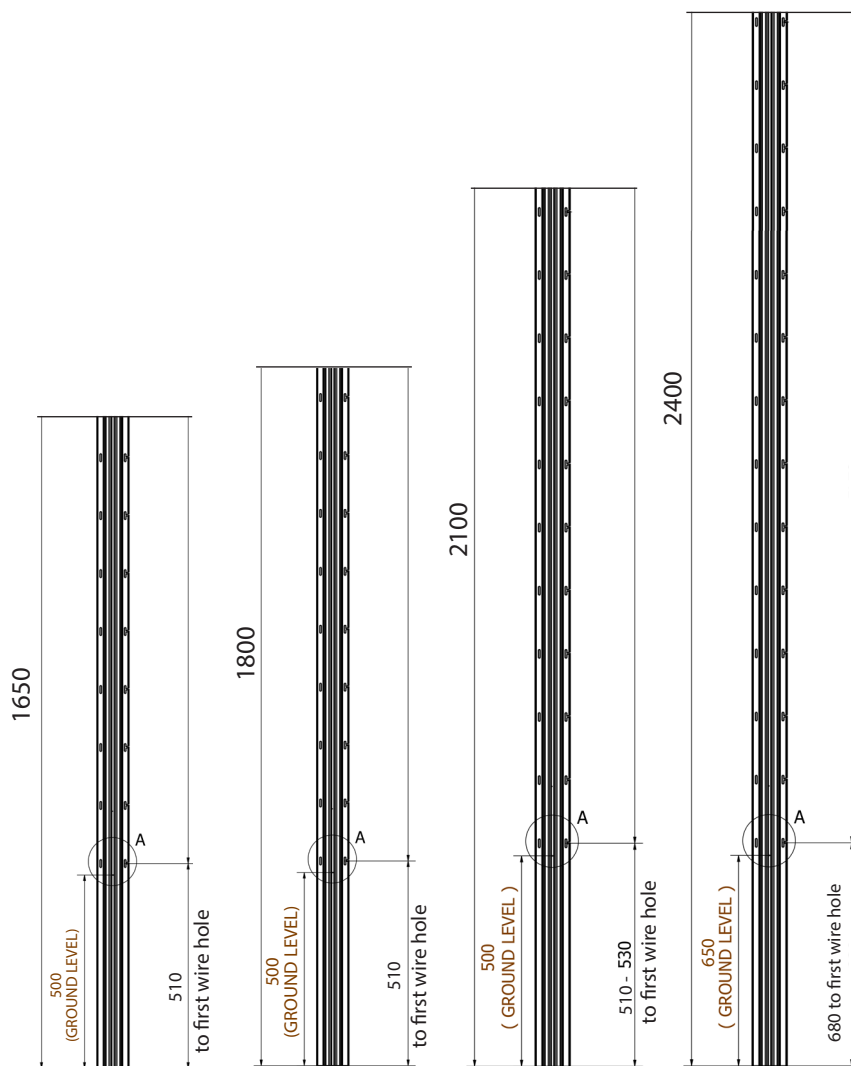

Length	1.65	1.8	2.1	2.4
Wire Hole Numbers at spacings 150mm	8	9	11	14
Wire Hole Numbers at spacings 75mm	16	18	22	28



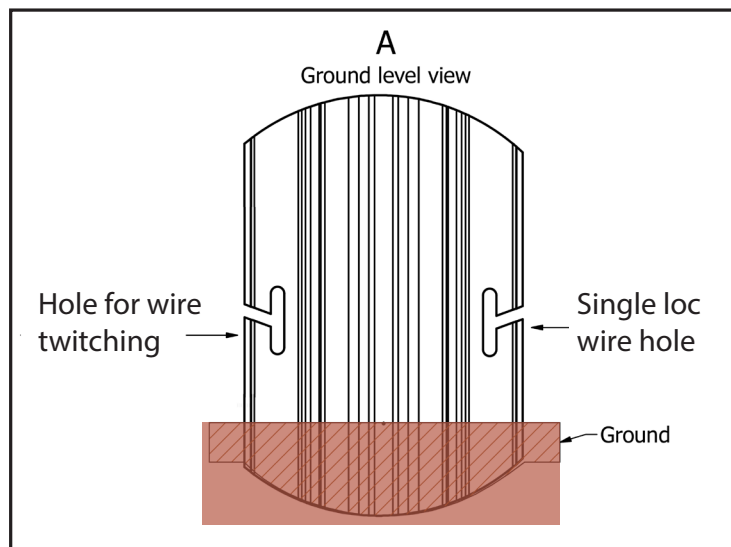
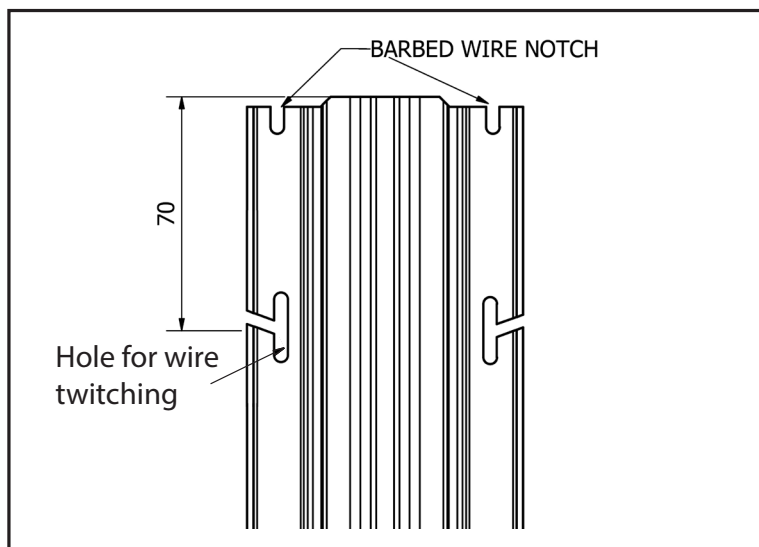


If there is a feature you need to vary on this product, such as depth, insertion, or hole quantities, please send us your drawings.

Ocloc™ Rural

Manufactured in Australia

Ocloc Rural Angled Stay SF - WRF
Suggested Post Pattern & Spacing at 5m or 6m apart
Ocloc ARF/BRF fence post & WRF for maximum support.
7m apart Ocloc ARF is preferred.

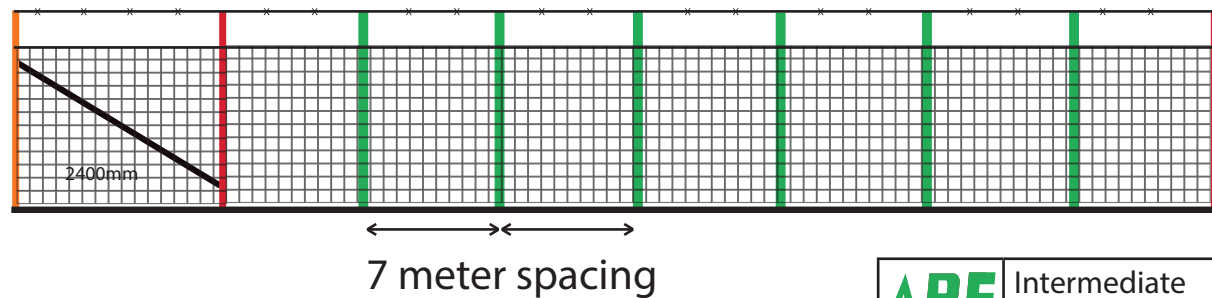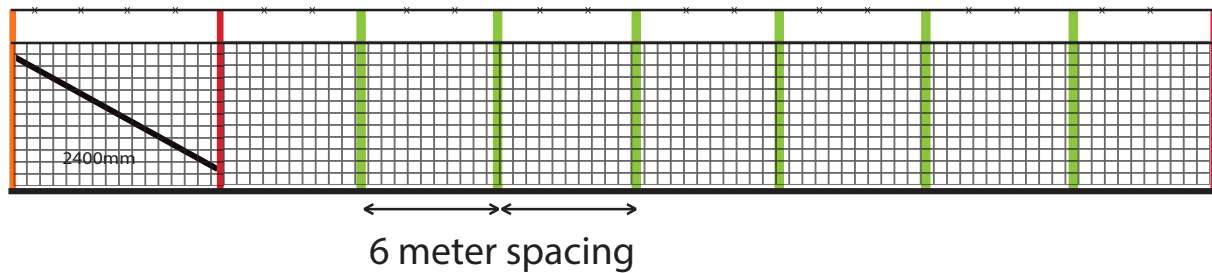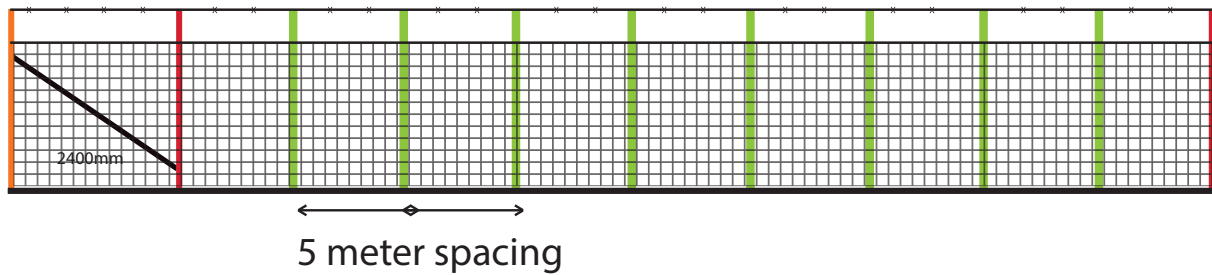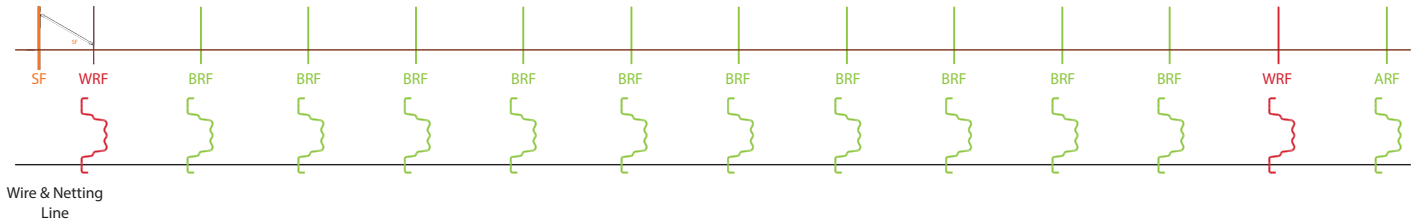

ARF	Intermediate
BRF	Medium Intermediate
WRF	Large Support Post
SF	Strainer

160 Main Road | McLaren Vale SA | Postal Address | PO Box 91 | McLaren Vale 5171 SA

Nigel Catt | Email: nigel@ocloc.com.au | Phone: 0418 832 967

Brian O'Malley | Email: brian@ocloc.com.au | Phone: 0424 112 120