


Ocloc™ W

Ocloc trellis post 75mm wire hole spacings
Galfan protected. Available in **VSP** and **TWS**.


Length available in: Number of wire holes:

1.8m = 6 feet	12 holes
2.1m = 7 feet	16 holes
2.4m = 8 feet	20 holes
2.7m = 9 feet	20 holes

Thickness of materials: 2.4mm

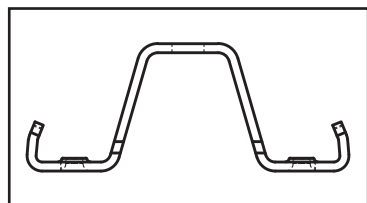


Ocloc W Profile

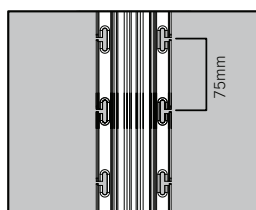

75mm wire hole spacings

KEY		
		400mm
		500mm
		600mm
Recommended insertion depth		
VSP	= Vertical Shoot Positioning	
TWS	= Two (Three) Wires Simple	
GL	= Ground Level	
D	= Dripper hole	

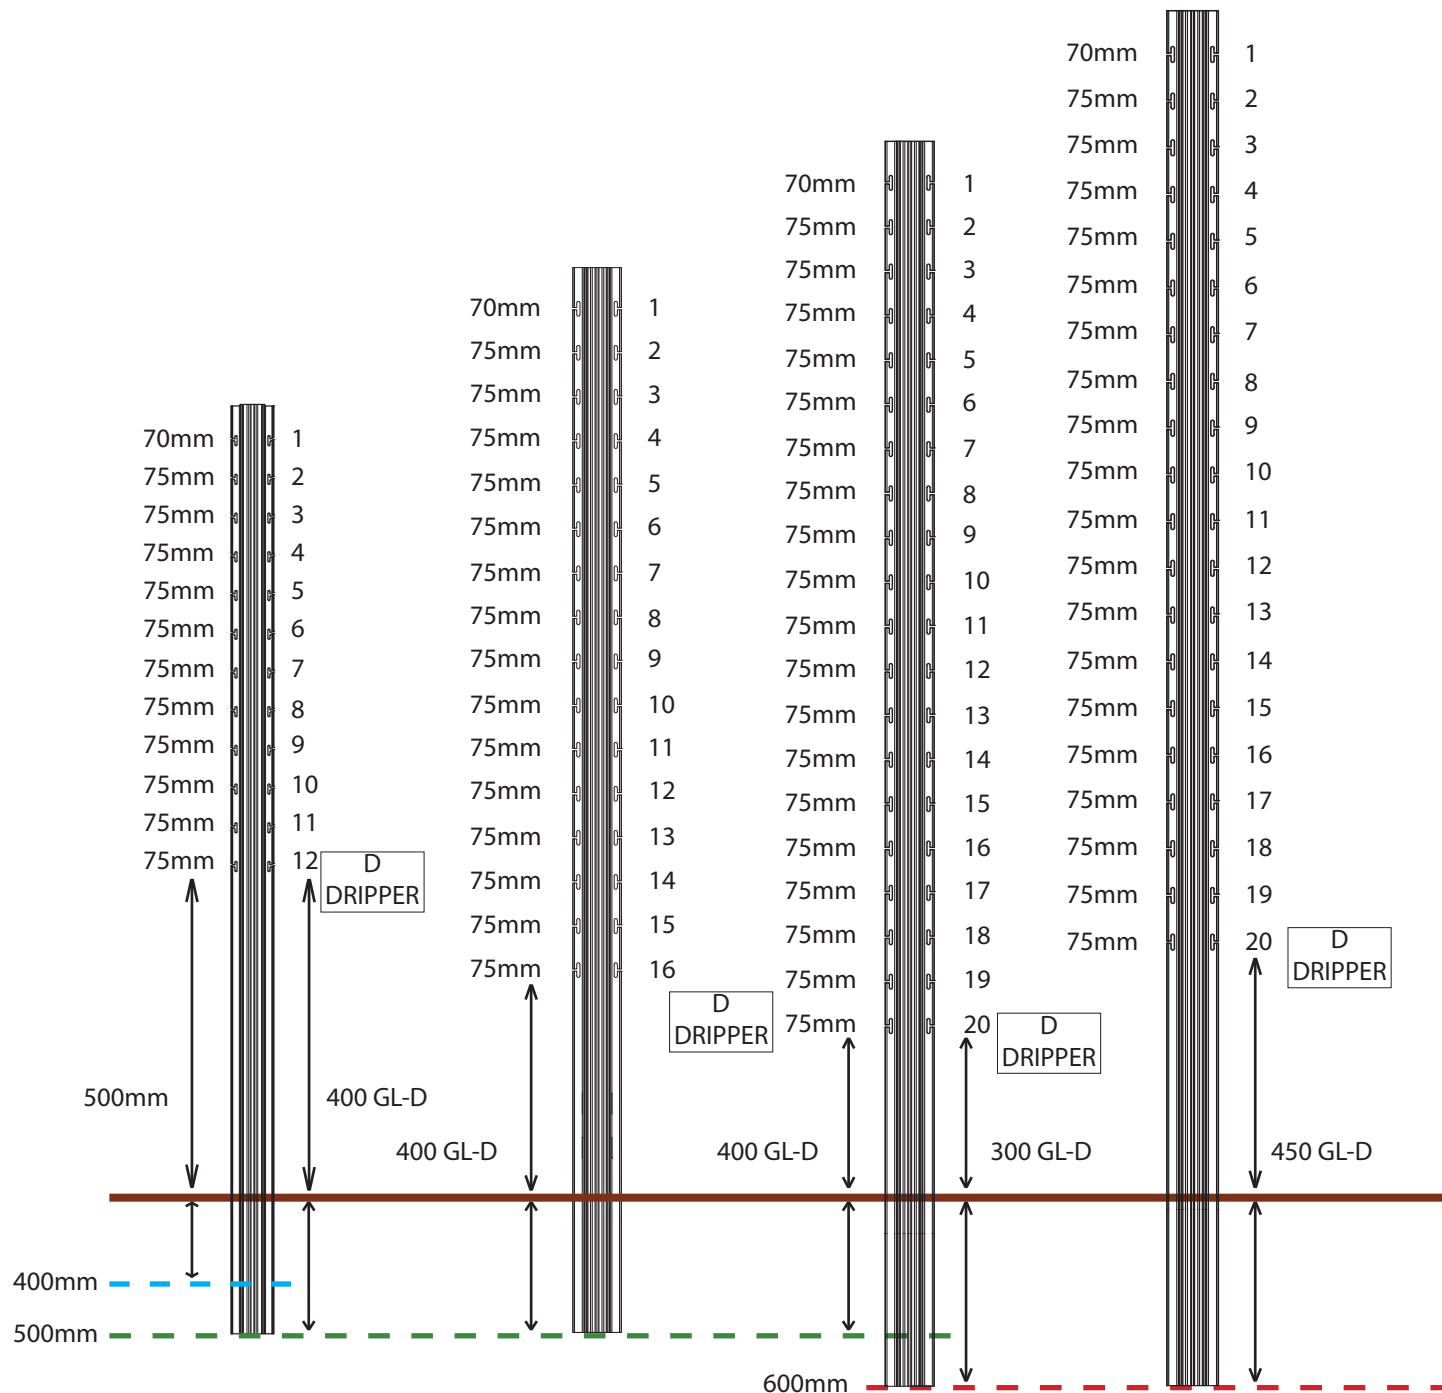

Length		1.8m = 6 feet	2.1m = 7 feet	2.4m = 8 feet	2.7m = 9 feet
Ordering Codes	TWS	W1.8TWS-75	W2.1TWS-75	W2.4TWS-75	W2.7TWS-75
	VSP	W1.8VSP-75	W2.1VSP-75	W2.4VSP-75	W2.7VSP-75